



Datos dimensionales (Milímetros)

Dimensional data (Millimeters)






A	B	C	E	L	M	N
±0.05	±0.05	±0.05	MAX.	±0.05	±0.05	±0.012
10	21.0	17.0	20.0	17.5	5.5	10.0
12	23.0	19.0	22.0	17.5	5.5	10.0
14	25.0	21.0	25.0	17.5	5.5	10.0
16	27.0	23.0	27.0	19.5	5.5	10.0
18	33.0	27.0	30.0	20.5	7.0	11.5
20	35.0	29.0	32.0	22.0	7.0	11.5
22	37.0	31.0	35.0	23.5	7.0	11.5
24	39.0	33.0	38.0	25.0	7.0	11.5
25	40.0	34.0	40.0	26.5	7.0	11.5
28	43.0	37.0	43.0	26.5	7.0	11.5


CONDICIONES DE OPERACIÓN

Velocidad: Hasta 3,600 R.P.M.
 Presion: 145 PSI (10Kg/cm²)
 *Temperatura: -57 °C ~ 204°C
 *Depende del material del elastómero

OPERATION CONDITIONS

Velocity: Up to 3,600 R.P.M.
 Pressure: 145 PSI (10Kg/cm²)
 *Temperature: -57 °C ~ 204 °C
 * Depends on elastomer material

-  **Partes Metalicas:** Acero Inoxidable 316
Metal Parts: 316 Stainless Steel
-  **Resorte:** Acero inoxidable 304, 316
Spring: 304, 316 Stainless Steel
-  **Cara:** Carbón Grafito
Rotary Face: Graphite
-  **Empaque:** NBR (Nitrilo®), FKM (Vitón®), EPR (EPDM)
Bellow: NBR (Nitrile), FKM (Viton®), EPR (EPDM)
-  **Asiento:** Acero Inoxidable, Carburo de Silicio
Seat: Stainless Steel, Silicon Carbide

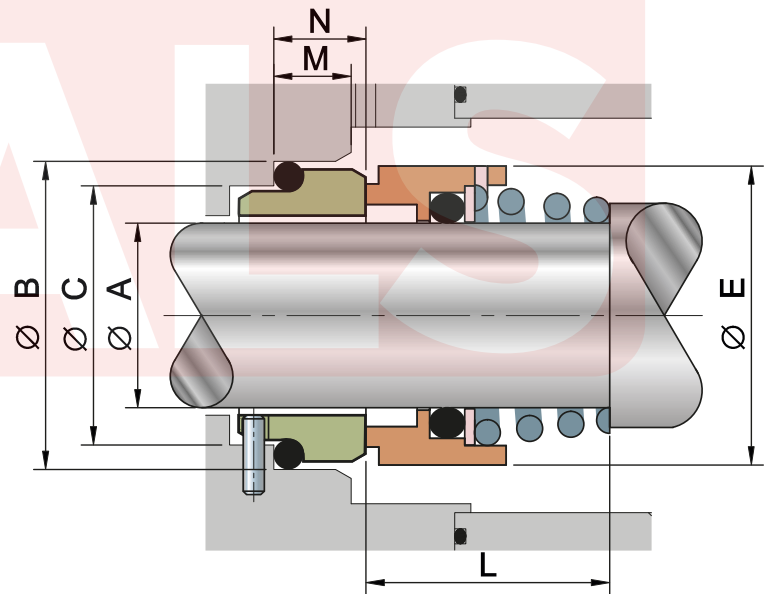

Se ofrece como estándar con estacionaria tipo G9 y resorte derecho.

Also available with stationary type G9 and right spring.