



Datos dimensionales (Pulgadas) "SMALL BORE" (CBS)

Dimensional data (Inches)

MEDIDA SIZE No.	A	B	C	D	E	F	G	H	I
	±0.002	±0.031	MIN	MAX	±0.015	±0.015	±0.005	±0.015	±0.005
22	1.375	4.000	2.125	2.000	1.750	1.500	3.250	0.437	2.625
30	1.875	5.625	2.625	2.500	1.750	1.750	3.750	0.437	3.125
42	2.625	7.375	3.625	3.500	1.750	2.125	5.500	0.562	4.250

Datos dimensionales (Pulgadas) "BIG BORE" (OVS)

Dimensional data (Inches)


MEDIDA SIZE No.	A	B	C	D	E	F	G	H	I
	±0.002	±0.031	MIN	MAX	±0.015	±0.015	±0.005	±0.015	±0.005
22	1.375	4.750	2.875	2.000	1.750	1.500	4.000	0.437	3.375
30	1.875	7.000	3.625	2.500	1.750	1.750	5.000	0.562	4.125
42	2.625	7.875	4.625	3.500	1.750	2.125	6.000	0.562	5.125

CONDICIONES DE OPERACIÓN

Velocidad: **Hasta 3,600 RPM**
 Presion: **150PSI (10.6 Kg/cm²)**
 *Temperatura: **-57°C ~ 204°C**
 *Depende del material del elastómero

OPERATION CONDITIONS

Speed: **Up to 3,600 RPM**
 Pressure: **150PSI (10.6Kg/cm²)**
 *Temperature: **-57°C ~ 204°C**
 * Depends on elastomer material

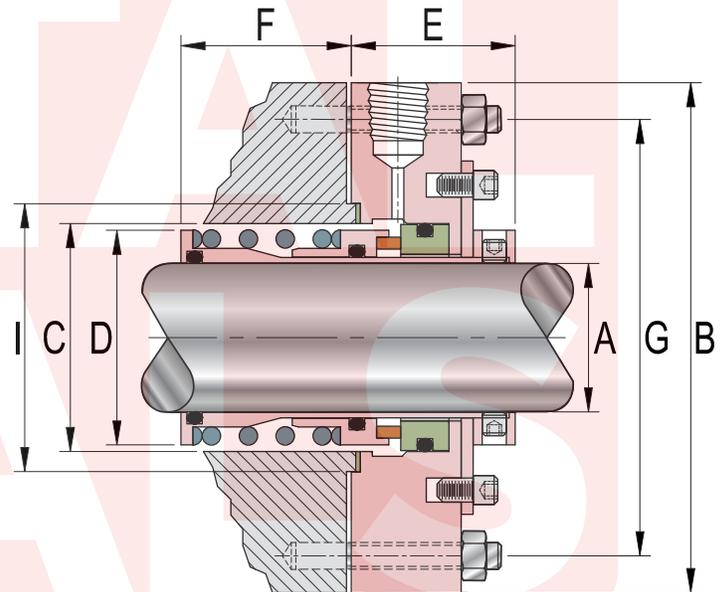

● **Partes Metalicas:** Acero inoxidable 316
Metal Parts: 316 Stainless Steel

● **Resorte:** Acero Inoxidable 316
Spring: 316 Stainless Steel

● **Cara:** Carbón Grafito, Carburo de Tungsteno,
 Carburo de Silicio.
Rotary Face: Graphite, Tungsten Carbide,
 Silicon Carbide.

● **Empaque:** NBR (Nitrilo®), FKM (Vitón®), E.P.R (EPDM),
 Kalrez/Perlast (FFKM), Aflas (TFE/P), y Silicón (VMQ)
Bellow: NBR (Nitrile), FKM (Viton®), E.P.R (EPDM),
 Kalrez/Perlast (FFKM), Aflas (TFE/P), Silicon (VMQ).

● **Asiento:** Cerámica, Carburo de Silicio, Carburo de
 Tungsteno, Acero Inoxidable, Ni-Resist.
Seat: Ceramic, Silicon Carbide, Tungsten Carbide,
 Stainless Steel, Ni- Resist.

