

Datos dimensionales (Pulgadas)

Dimensional data (Inches)


MEDIDA SIZE	A	B	C	D	E	F	G	H
No.	±0.002	±0.015	MIN	MAX	±0.015	±0.015	±0.015	±0.015
20	1.250	4.250	1.695	1.625	2.000	0.750	3.213	0.562
22	1.375	4.375	1.820	1.750	2.000	0.750	3.338	0.562
24	1.500	4.875	2.007	1.937	2.000	0.750	3.599	0.562
26	1.625	5.000	2.132	2.062	2.000	0.750	3.766	0.562
28	1.750	5.250	2.240	2.170	2.000	0.750	3.875	0.562
30	1.875	5.250	2.382	2.312	2.000	0.750	3.875	0.562
32	2.000	5.500	2.507	2.437	2.000	0.875	4.000	0.562
34	2.125	5.875	2.632	2.562	2.000	0.875	4.469	0.687
36	2.250	6.500	2.757	2.687	2.000	0.875	4.566	0.687
38	2.375	6.500	2.882	2.812	2.000	0.875	4.719	0.687
40	2.500	6.750	3.132	3.062	2.000	0.875	5.000	0.687

CONDICIONES DE OPERACIÓN

Velocidad: Hasta 3,600 R.P.M.
Presión: 450 PSI (32.0Kg/cm²)
*Temperatura: -57°C ~ 316°C
*Depende del material del elastómero

OPERATION CONDITIONS

Velocity: Up to 3,600 R.P.M.
Pressure: 450 PSI (32.0Kg/cm²)
*Temperature: -57°C ~ 316°C
*Depends on elastomer material

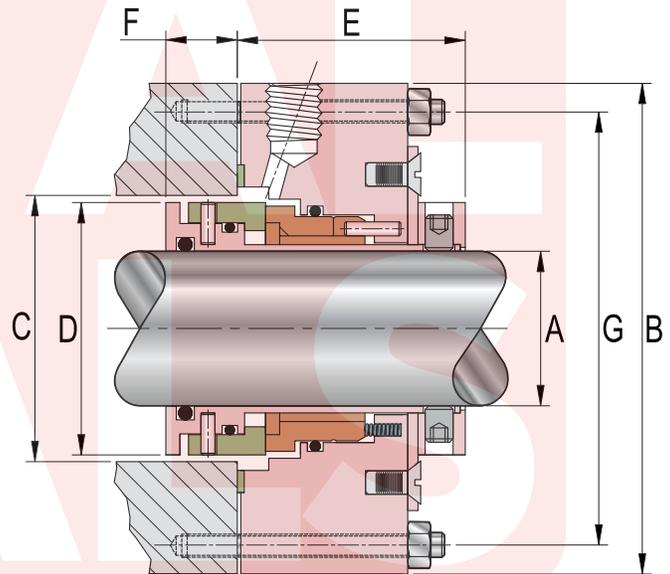

Partes Metálicas: Acero inoxidable 316
Metal Parts: 316 Stainless Steel

Resorte: Hastelloy "C"
Spring: Hastelloy "C"

Cara: Carbón Grafito, Carburo de Silicio.
Rotary Face: Graphite, Silicon Carbide.

Empaque: NBR (Nitrilo®), FKM (Vitón®), E.P.R (EPDM),
Kalrez/Perlast (FFKM), Aflas (TFE/P), Creavey
(PTFE/FKM) y Silicón (VMQ).

Bellow: NBR (Nitrile), FKM (Viton®), E.P.R (EPDM),
Kalrez/Perlast (FFKM), Aflas (TFE/P), Creavey (PTFE/FKM),
Silicon (VMQ).

Asiento: Carburo de Silicio, Carbón Grafito.
Seat: Silicon Carbide, Graphite.

