



Datos dimensionales (Pulgadas)

Dimensional data (Inches)


MEDIDA SIZE No.	A	E	L	K
12	±0.002 3/4	±0.015 1.855	±0.015 1.062	±0.015 0.440
16	1	1.855	1.062	0.440
18	1-1/8	2.120	1.000	0.440
24	1-1/2	2.610	1.187	0.440

CONDICIONES DE OPERACIÓN

Velocidad: **Hasta 3,600 RPM**
 Presion: **145 PSI (10.2Kg/cm²)**
 *Temperatura: **-51 °C ~ 219 °C**
 *Depende del material del elastómero

OPERATION CONDITIONS

Speed: **Up to 3,600 RPM**
 Pressure: **145 PSI (10.2Kg/cm²)**
 *Temperature: **-51 °C ~ 219 °C**
 *Depends on elastomer material

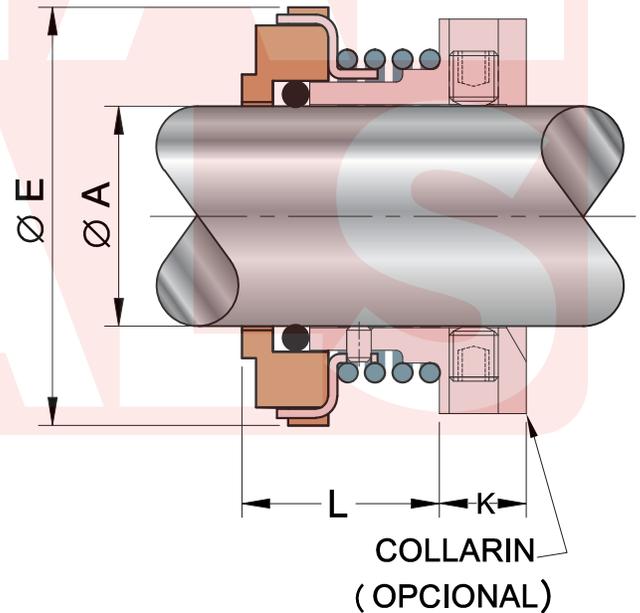

● **Partes Metalicas:** Acero Inoxidable 304, 316
Metal Parts: 304, 316 Stainless Steel

● **Resorte:** Acero inoxidable 304, 316
Spring: 304, 316 Stainless Steel

● **Cara:** Carbón Grafito FDA, Carburo de Silicio
Rotary Face: Graphite FDA, Silicon Carbide

● **Empaque:** NBR FDA (Nitrilo FDA), FKM FDA (Vitón® FDA) y Silicón (VMQ)
Bellow: NBR FDA (Nitrilo FDA), FKM FDA (Viton FDA) y Silicon (VMQ)

*Para parte estacionaria consulte planta.
 *For stationary part consult plant.